



EV-68 N

Model		EV-68N	
Rated output	Kw(ps)	165.5(225)	176.5(240)
	rpm	2500	2500
Max. Torque	kgf.m(Nm)	60(588)	90(883)
	rpm	1500	1500
Compression ratio		10.6:1	
Displacement (l)		6.798	
No. of cylinder		6 - inline	
Aspiration		Turbo & Intercooler	
Combustion type		Stoichiometric	
Fuel		CNG	
Dimension(mm)		1267 x 973 x 970	
Dry Weight(kg)		637	
Flywheel		PCD Φ 410, 12-M10x1.5	
Flywheel Housing		SAE #2	

Engine Configuration & Dimensions

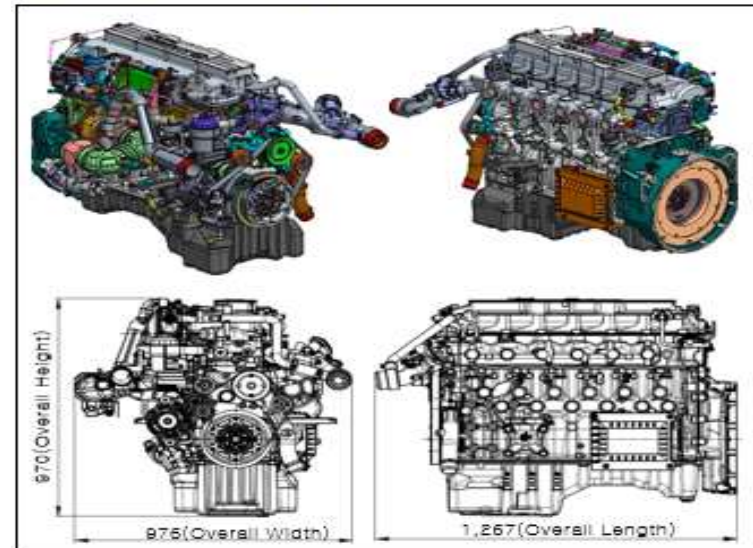

Performance Curve

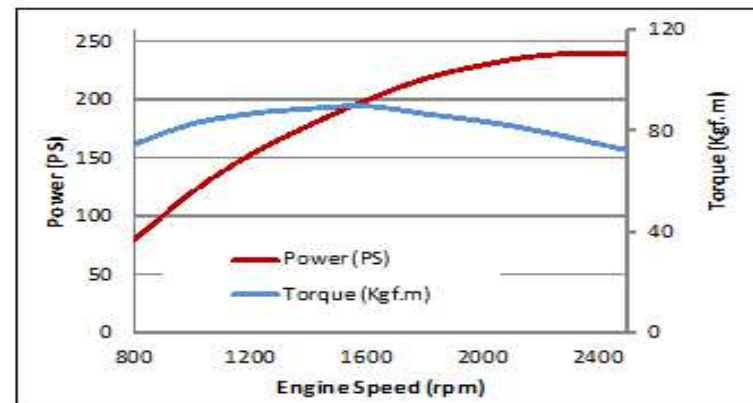

The engine performance corresponds to ISO 3046 (Without a cooling fan). The product images shown are for illustration only and may not be an exact representation of the final product. All information is subject to change without notice.