



EV-25 N

Model	EV-25N	
Rated output	Kw(ps)	74.3(101)
	rpm	3800
Max. Torque	kgf.m(Nm)	23.5(230)
	rpm	2000
Compression ratio	11.5:1	
Displacement (l)	2.476	
No. of cylinder	4 - inline	
Aspiration	Turbocharger & Intercooler	
Combustion type	Lean Burn	
Fuel	CNG (*LPG)	
Dimension(mm)	721 x 713 x 738	
Dry Weight(kg)	210	
Flywheel	PCD Φ 276, 6-M8x1.25	
Flywheel Housing	PCD Φ 343.9, 10-M10x1.25	

Engine Configuration & Dimensions

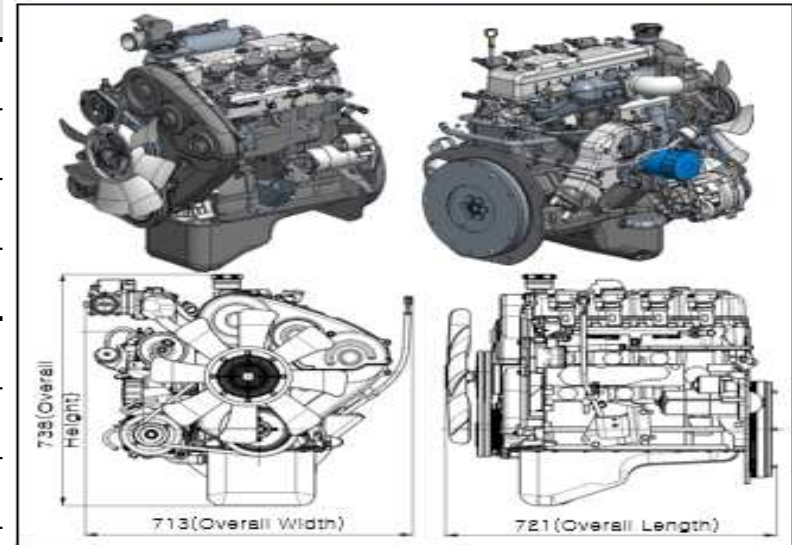

Performance Curve

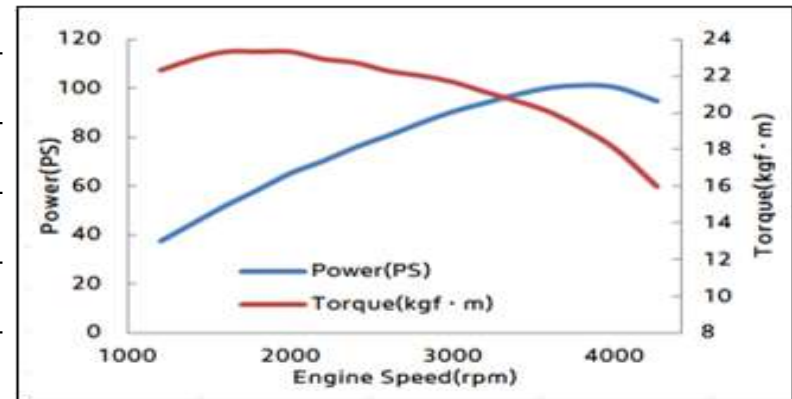

The engine performance corresponds to ISO 3046 (Without a cooling fan). The product images shown are for illustration only and may not be an exact representation of the final product. All information is subject to change without notice.